

KeypadLinc™ Button-Change Kit Replacement Steps

For Models:

KeypadLinc Change Kits:

| | |
|------------------|--------|
| 2401AL6, 2401AL8 | Almond |
| 2401BK6, 2401BK8 | Black |
| 2401BR6, 2401BR8 | Brown |
| 2401GY6, 2401GY8 | Gray |
| 2401IV6, 2401IV8 | Ivory |
| 2401WH6, 2401WH8 | White |

SMARTHOME
MAKING LIFE MORE CONVENIENT, SAFE AND FUN

IN
S
T
E
N

Introduction

Depending on the kit purchased, the installer or end-user can easily change the KeypadLinc frame and button color. The frame and buttons can be changed before or after the KeypadLinc is installed in the wall. However, it is easier to do the changes prior to installing the KeypadLinc.

During the changeover process, the power and the load may remain on and operating. There are no dangerous voltages or unsafe areas while the button plate is removed.


The change kit is compatible with older versions of the KeypadLinc made after 2002. Earlier KeypadLinc models with an all-plastic body cannot use the change kit.

Kit Contents

- 1 frame that replaces the frame currently installed on a KeypadLinc
- 1 Skeleton button plate
- 6 or 8 colored opaque buttons

Disassembling the KeypadLinc

1. If the KeypadLinc is installed in the wall, remove the trim plate.
2. Remove the four Phillips screws that hold the frame and buttons to the metal bracket.
3. Pull the entire frame straight away from the switch. Also pull away the button plate assembly (the plastic pieces the button caps are attached to). You may have to wiggle the bottom of the frame to get it free of the bottom Set Button.

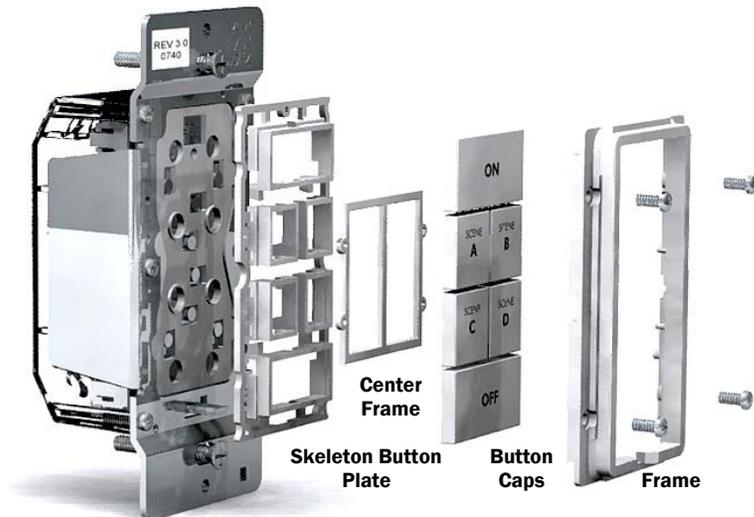

Reassembling The KeypadLinc

1. Place the new frame on to the skeleton button plate.
2. On the backside of the frame, there are several protrusions that will align up with the button plate.
3. Place the frame and skeleton button plate assembly onto the KeypadLinc and reinstall the four screws.

To Change From a 8-Button to an 6-Button KeypadLinc

After reinstalling the KeypadLinc:

1. Pull the set button all the way out and wait 10 seconds.
2. Press in the set button while holding in the "ON" and "OFF" buttons.

To Change From a 6-Button to an 8-Button KeypadLinc

After reinstalling the KeypadLinc:

1. Pull the set button all the way out and wait 10 seconds.
2. Press in the set button while holding in the "Main" and "H" buttons.

Smarthome Limited Warranty

Smarthome warrants to the original consumer purchaser of this product that, for a period of two years from the date of purchase, this product will be free from defects in material and workmanship and will perform in substantial conformity to the description of the product in this Owner's Manual. This warranty shall not apply to defects or errors caused by misuse or neglect.

If the product is found to be defective in material or workmanship or if the product does not perform as warranted above during the warranty period, Smarthome will either repair it, replace it or refund the purchase price, at its option, upon receipt of the product at the address below, postage prepaid, with proof of the date of purchase and an explanation of the defect or error. The repair, replacement, or refund that is provided for above shall be the full extent of Smarthome's liability with respect to this product.

For repair or replacement during the warranty period, call Smarthome customer service to receive an RA# (return authorization number), properly package the product (with the RA# clearly printed on the outside of the package) and send the product, along with all other required materials to:

**Smarthome - ATTN: Receiving Dept.
16542 Millikan Ave. Irvine, CA 92606-5027**

SwitchLinc, KeypadLinc, SignaLinc, LampLinc, PowerLinc, ToggleLinc, BoosterLinc, ApplianceLinc, ControlLinc, TesterLinc, FilterLinc, ProbeLinc, TempLinc, TouchLinc, IR Linc, Insteon, SignaLinc RF, & SmarthomeLive are trademarked by Smarthome, Inc.

© Copyright 2008 SmartHome, Inc.
949.221.9200
rev 01072008

800.SMART.HOME -
www.smarthome.com

