



Global Caché GC-SC1 Contact Closure Sensor

The Global Caché GC-SC1 is a contact closure sensor. Its circuitry provides a rapid response to contact closure (4mS typ) with a slow response to contact opens (75mS typ). This eliminates false triggers due to contact bounce created by mechanical contacts coming together, such as push buttons or relays. The following illustrates a typical push button installation along with the GC-SC1 response.

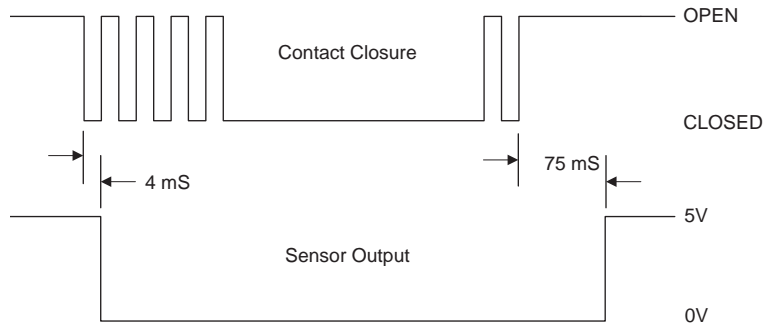

GC-SC1 Output Diagram

The GC-SC1 plugs directly into the GC-100 Network Adapter's IR/Sensor connector for proper operation. (The GC-100 connector must be configured as an input. See the *GC-100 Quick Start* for more information.) The GC-SC1 is connected directly across the contacts, with the open/close state to be determined. There is no polarity to the wiring. Below is a typical installation using the GC-SC1.

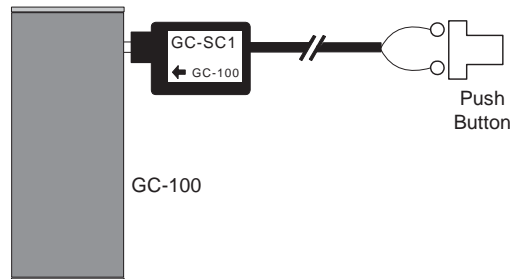

Using the GC-SC1 to detect a push button

The GC-SC1 requires +5V (supplied by the GC-100) to operate and provides a logic level output representing the contact closure state. The pin assignments are shown in the diagram below.



Specifications:	<u>Minimum</u>	<u>Typical</u>	<u>Maximum</u>
Sensor output from contact CLOSE	-	4.0 mS	6.0 mS
Sensor output from contact OPEN	-	75 mS	90 mS
Steady-state current for contact CLOSE	-	50 μ A	75 μ A
In-rush current at initial CLOSE	-	1.5 mA	2.0 mA
Sensor output ON voltage @100 μ A	Vcc - 0.1V	-	-
Sensor output OFF voltage @100 μ A	-	-	0.1V
Vcc, Supply Voltage	4.50V	-	5.50V
Supply Current	-	50 μ A	100 μ A



Global Caché, Inc.
 160 East California Street, PO Box 1659
 Jacksonville, Oregon 97530
 Phone (541) 899-4800
 Fax (541) 899-4808
www.globalcache.com
 Support: support@globalcache.com /Sales:
sales@globalcache.com
 Copyright ©2007 Global Caché, Inc. All rights reserved.
 PN: 0413104-01 ver 5/Information subject to change without notice.