

SwitchLinc™ Paddle
Assembly and Light Pipe
Replacement Instructions

IN
S
T
E
A
L
I
N
G



Introduction

This kit allows the installer or end-user to easily change the SwitchLinc paddle or LED color. The front paddle and frame on the SwitchLinc can be removed before or after installation.

During the change-over process, the power and the load may remain on and operating. There are no dangerous voltages or unsafe areas under the paddle.

Kit Contents

Paddle Color Change Kits:


- Two assembled paddle and frame assemblies
- Four extra screws

LED Color Change Kit

- Colored light pipes
- Four extra screws



1. If the SwitchLinc is installed in the wall, remove the wall plate.
2. Remove the four Phillips screws that hold the paddle assembly to the metal frame.
3. Pull the entire frame straight away from the switch. You may have to wiggle the bottom of the frame to get it free of the bottom Set Button.

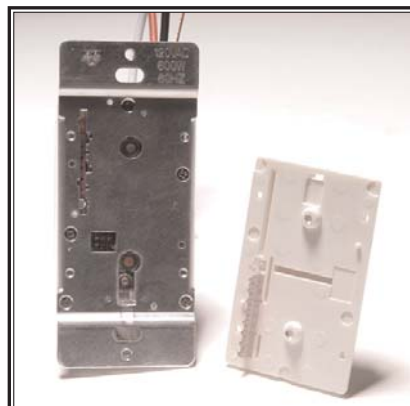


Paddle Assembly and SwitchLinc separated




4. Using a flat blade or needle nose pliers, remove the large light pipe as shown. The light pipe will snap out of the frame. Do the same for the small light pipe.



Snap out the light pipes with a flat object



5. To re-install, place the small light pipe with the notch towards the center of the frame and snap into place. If placed in backwards or reverse, it will not click into place. Refer to the diagram on page 8.

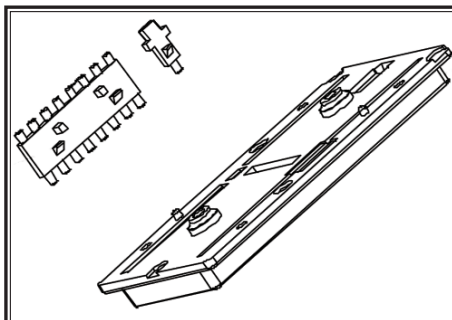

Light Pipe Re-installation
The pipes' notches are installed towards the center of the paddle.



6. Install the large light pipe with the side that has four notches towards the center of the frame.

Using only finger pressure, snap the light pipe into the frame.




7. If both light pipes are installed correctly, they will stick straight out from the back of the frame. If installed incorrectly, they will appear to be tilted. (See photos on page 11.)



Installed correctly

8. Gently place the paddle assembly back onto the front of the SwitchLinc. Test by pressing paddle top/bottom to properly ensure paddle is "seated," adjust/reinstall as required. Reinstall the four screws removed in step 2.

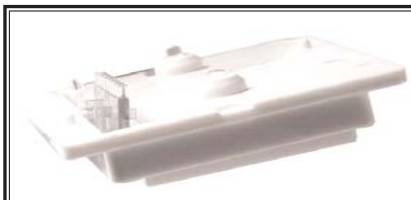

Installed incorrectly



Smarthome Limited Warranty

Smarthome warrants to the original consumer purchaser of this product that, for a period of two years from the date of purchase, this product will be free from defects in material and workmanship and will perform in substantial conformity to the description of the product in this Owner's Manual. This warranty shall not apply to defects or errors caused by misuse or neglect.

If the product is found to be defective in material or workmanship or if the product does not perform as warranted above during the warranty period, Smarthome will either repair it, replace it or refund the purchase price, at its option, upon receipt of the product at the address below, postage prepaid, with proof of the date of purchase and an explanation of the defect or error. The repair, replacement, or refund that is provided for above shall be the full extent of Smarthome's liability with respect to this product.

For repair or replacement during the warranty period, call Smarthome customer service to receive an RA# (return authorization number), properly package the product (with the RA# clearly printed on the outside of the package) and send the product, along with all other required materials to:

Smarthome - ATTN: Receiving Dept.
16542 Millikan Ave. Irvine, CA 92606-5027

SwitchLinc, KeypadLinc, SignalLinc, LampLinc, PowerLinc, ToggleLinc, BoosterLinc, ApplianceLinc, ControlLinc, TesterLinc, FilterLinc, ProbeLinc, TempLinc, TouchLinc, IR Linc, Insteon, SignalLinc RF, & SmarthomeLive are trademarks by Smarthome, Inc.

© Copyright 2006 Smarthome, Inc.
800.SMART.HOME - 949.221.9200
www.smarthome.com

rev 012006

